

# PRODUCT DATASHEET

## DULUX S 5 W/840

OSRAM DULUX S | Short CFLni, with 2-pin base for CCG operation



---

### AREAS OF APPLICATION

- Ideal for cost-effective creative illumination and decoration
- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants

---

### PRODUCT BENEFITS

- Extremely economical
- Good quality of light
- Extremely low profile
- Long service life
- Improved maintenance

---

### PRODUCT FEATURES

- Color rendering index  $R_a \geq 80$
- Short and compact pin-base lamps with single-turn tubes
- Single-ended two-pin plug-in G23 base



**TECHNICAL DATA**

Electrical data

Nominal voltage	35 V
Rated wattage	5.40 W
Nominal wattage	5.00 W
Nominal current	0.18 A

Photometrical data

Nominal luminous flux	257 lm
Luminous flux at 25 °C	250 lm
Rated luminous flux	257 lm
Rated color temperature	4000 K
Color rendering index Ra	≥80
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.80
Rated LLMF at 6,000 h	0.77
Rated LLMF at 8,000 h	0.75
Light color (designation)	LUMILUX Cool White
Color temperature	4000 K
Luminous flux	257 lm
Color rendering index Ra	≥80

Dimensions & weight



Overall length	106.0 mm
Length	108.0 mm
Length acc. to IEC standard	85 mm
Length with base excl. base pins/connection	85.00 mm
Outer bulb	T11
Maximum diameter	11.0 mm

## Lifespan

Nominal lamp life time	10000 h
Rated lamp life time	10000 h
Service life	6500 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.81
Operation mode LLMF/LSF	50 Hz
Lifespan	10000 h <sup>1)</sup>

<sup>1)</sup> With CCG/LLCG

## Additional product data

Base (standard designation)	G23
Mercury content	1.3 mg

## Certificates &amp; standards

Energy consumption	8 kWh/1000h
Energy efficiency class	B

## Country-specific categorizations


ILCOS	FSD-5/840-I-G23
-------	-----------------

Light Distribution




Spectral power distribution


Wiring Diagram

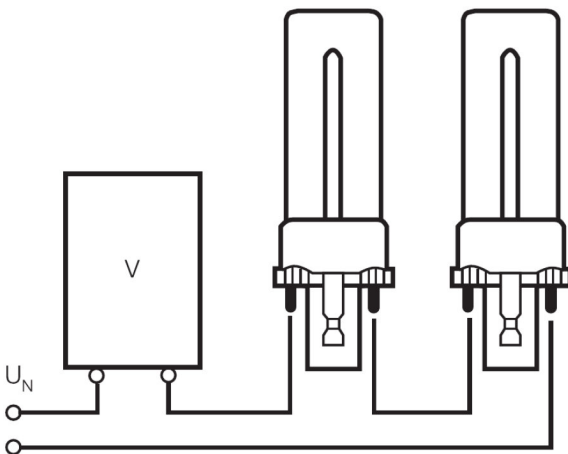

Wiring diagram

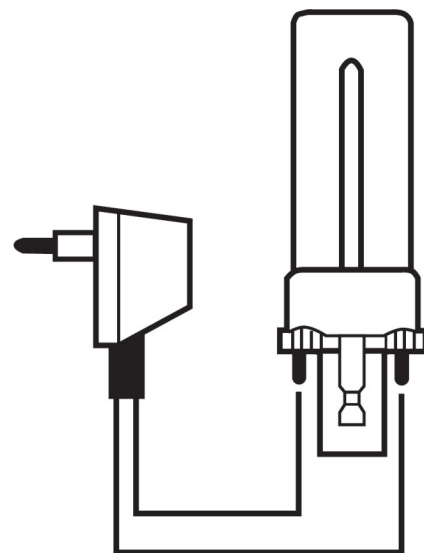

Wiring diagram

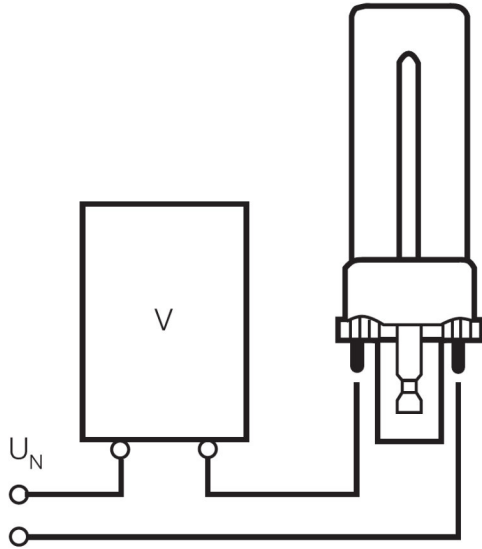

Wiring diagram

**EQUIPMENT / ACCESSORIES**

- Suitable for operation on conventional control gear

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300010564	Folding carton box 1	115 mm x 23 mm x 36 mm	25.80 g	0.10 dm <sup>3</sup>
4050300240862	Shipping carton box 10	95 mm x 128 mm x 113 mm	299.00 g	1.37 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.