

PRODUCT DATASHEET

DULUX T PLUS 13 W/840

OSRAM DULUX T PLUS | CFLni, 3 tubes, with 2-pin base for CCG operation



AREAS OF APPLICATION

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industrial lighting

PRODUCT BENEFITS

- Very economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance

PRODUCT FEATURES

- Average life: 10,000 h
- Color rendering index $R_a \geq 80$
- Short and compact pin-base lamp with triple-turn tubes
- Single-ended two-pin plug-in GX24d base



TECHNICAL DATA


Electrical data

Rated wattage	13.00 W
Nominal wattage	13.00 W

Photometrical data

Nominal luminous flux	900 lm
Luminous flux at 25 °C	900 lm
Rated luminous flux	900 lm
Rated color temperature	4000 K
Color rendering index Ra	≥80
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.78
Rated LLMF at 6,000 h	0.76
Rated LLMF at 8,000 h	0.75
Light color (designation)	LUMILUX Cool White
Color temperature	4000 K
Luminous flux	900 lm
Color rendering index Ra	≥80

— Dimensions & weight

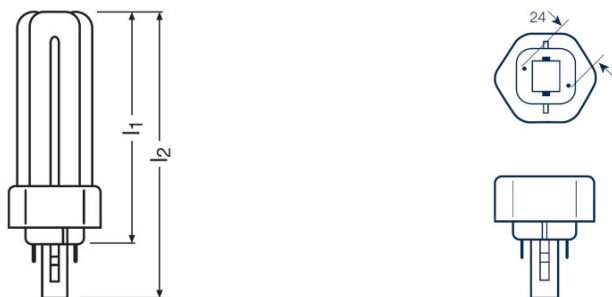

Diameter	11.0 mm
Overall length	111.0 mm
Length	113.0 mm
Length acc. to IEC standard	90 mm
Length with base excl. base pins/connection	90.00 mm
Outer bulb	T12
Maximum diameter	12.0 mm

Lifespan

Nominal lamp life time	10000 h
Rated lamp life time	10000 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.81
Operation mode LLMF/LSF	50 Hz
Lifespan	10000 h ¹⁾

¹⁾ With CCG/LLCG

Additional product data

Base (standard designation)	GX24d-1
Mercury content	1.7 mg

Capabilities

Dimmable	No
----------	----


Certificates & standards

Energy consumption	17 kWh/1000h
Energy efficiency class	A

Country-specific categorizations


ILCOS	FSM-13/840-I-GX24d-1
-------	----------------------

Light Distribution

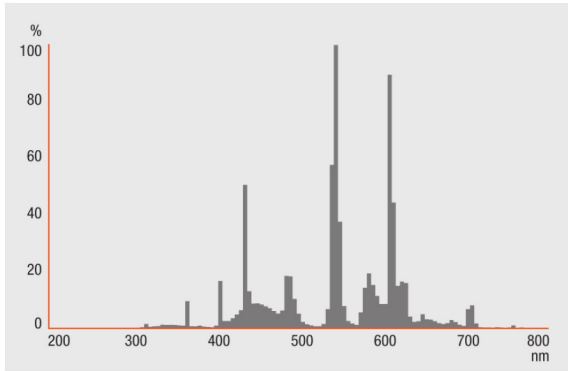

Spectral power distribution

Wiring Diagram

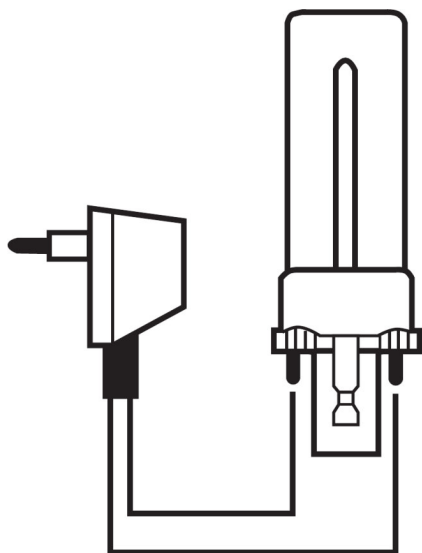

Wiring diagram

EQUIPMENT / ACCESSORIES

- Suitable for operation on conventional control gear
- Suitable for 0.22 A control gear only (DULUX T 18 W PLUS)

SAFETY ADVICE

In case of lamp breakage: www.ledvance.com/brokenlamp

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300446905	Folding carton box 1	121 mm x 46 mm x 49 mm	73.17 g	0.27 dm ³
4050300446912	Shipping carton box 10	181 mm x 139 mm x 182 mm	781.50 g	4.58 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.